



Gala CV Gasket / End Seal has been made from specially formulated Rubber Compound and designed to give optimum efficiency to the CV Line Curing process by holding pressure to the desired level during the production of power cables. It also helps to neutralize the usage of process water / gas by holding the Cable tight during production runs.


Gala CV Gaskets are high performing seals used in the entry and exit side of CV lines compatible with both water and gas cooling systems.

Technical Specifications*

TEST DESCRIPTION	TYPICAL VALUE	TEST METHOD
1. Dielectric Strength	12kV/mm. (min.)	ASTM D149
2. Tensile Strength	5 N/mm ² (min.)	ASTM D638
3. Elongation	300% (min.)	ASTM D638
4. Density	1.23 gm/cm ³	ASTM D792
5. Hardness	60 ± 5 Shore A	ASTM D2240
6. Continuous Operating Temp.	-20°C to 180°C	IEC 216

Features & Benefits :

- ❖ Long-lasting and durable.
- ❖ Withstands high temperature and pressure.
- ❖ Resistant to abrasion.
- ❖ Easy to handle.
- ❖ Harmless to insulation and sheath surface.
- ❖ Excellent mechanical properties.

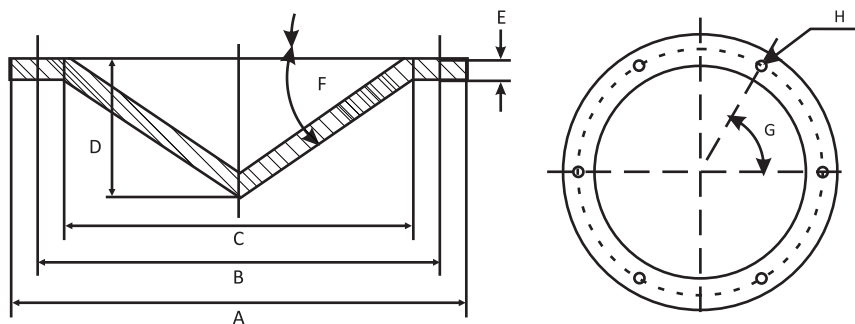

Selection Chart :

Gala Code	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
GSES-1 S	180	156	129	47	10	30°	60°	6x60° Ø9
GSES-1	255	226	195	68	10	30°	60°	6x60° Ø9

