


Description

GPO / E - 1112 - Series Class I termination kits are Heat Shrinkable terminations kits designed for 3 Core Paper Insulated Lead Covered Armoured / Screened PILC Cables.

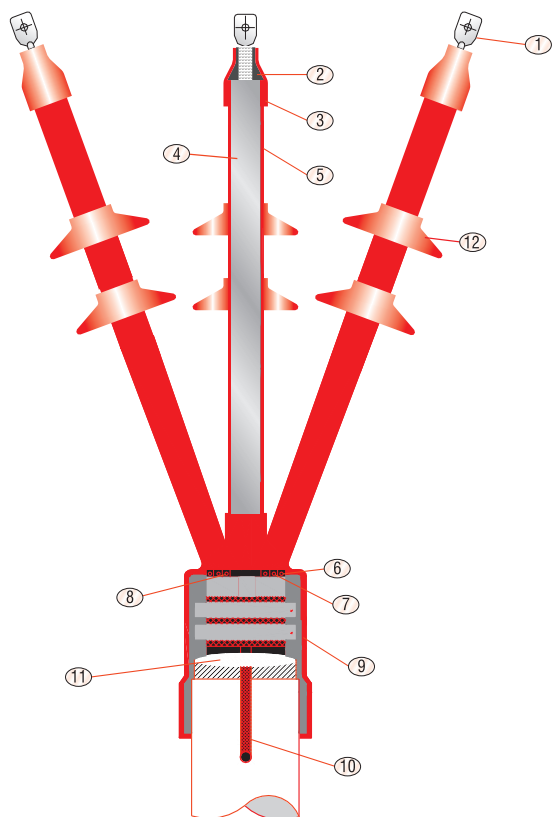

Kit Components

No.	Descriptions	Qty.
1.	Terminal Lug	3 Nos.
2.	Lug Sealing Mastic	3 Strips
3.	Terminal Sleeve	3 Nos.
4.	Oil Barrier Sleeve	3Nos.
5.	Non Tracking Weather Resistant Sleeve	3 Nos.
6.	Stress Control Sleeve	3 Nos.
7.	Belting Oil Barrier Sleeve	1 No.
8.	Glass Cushion Tape	1 No.
9.	Cable Breakout	1 No.
10.	Earthing Connection Lead	1 No.
11.	Earthing Plumb	1 Set
12.	Rain Sheds	6 Nos.

Installation aids & Accessories (Part of std. Kits)

No.	Descriptions	Qty.
•	Mastic Sealing Tape	1 Roll
•	Cleaning Solvent	1 Bottle
•	Emery Sheet	1 No.
•	Mopping Cloth	1 Pc.
•	Installation Instruction Manual	1 No.

BILL OF MATERIAL STD. PACKING KIT (● + ■)

- Kit Components
- Installation aids & Accessories (Part of std. kits)

Electrical Performance

Test	Requirement	Typical Value
A. C. Dry Withstand Voltage	35 kV / 1 Minute	Pass
D. C. Voltage Withstand Test	48 kV / 30 Minute	Pass
Lightening Impulse Withstand Voltage	75 kV	> 75 kV

Accessories and optional items

- Standard Tail Length is 600mm for outdoor and 450mm for indoor terminations. Special tail lengths available on request.
- Solderless and special purpose earthing kits also available on request.
- Polymeric Insulators and T Brackets for Installation of terminations on single pole are available on request.

Note

- All kits are supplied with full kit contents for making a termination.
- All Indoor Kits are supplied without Rain shed.

Ordering Informations

Cable Size (Sq. mm.)	Outdoor Kit Code	Indoor Kit Code
16 - 35	GPO-11	GPE-11
50 - 95	GPO-12	GPE-12
120 - 185	GPO-13	GPE-13
240 - 400	GPO-14	GPE-14
500	GPO-15	GPE-15