


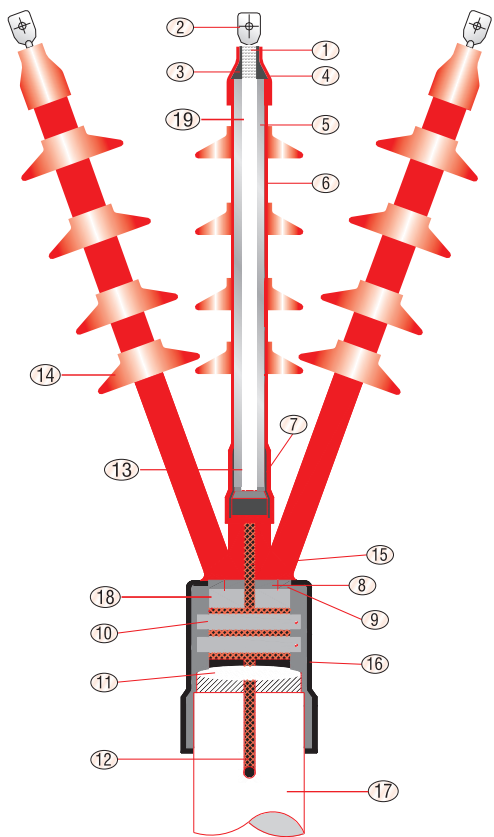

Descriptions

GPO / E - 3336 - Series Class I termination kits are Heat Shrinkable terminations kits designed for 3 Core Screen Lead Sheath / Armour Paper Insulated Cable UPTO 36kV (33kV& 36kV).

🏠 Cable Components		📦 Kit Components		
No.	Descriptions	No.	Descriptions	Qty.
1.	Conductor	2.	Terminal Lug	3 Nos.
17.	Outer Sheath	3.	Lug Sealing Tape/Mastic	3 Strips
18.	Lead Sheath	4.	Heat Shrinkable Adhesive	3 Nos.
19.	Paper Insulated Core		Lined Terminal Sleeve	
		5.	Heat Shrinkable Oil barrier Sleeve	3 Nos.
		6.	Heat Shrinkable Non Tracking Weather Resistant Tubing	3 Nos.
		7.	Stress Control Tubing	3 Nos.
		8.	Glass Cushion Tape	1 Roll.
		9.	Heat Shrinkable Belting Oil Barrier Sleeve	1 No.
		10.	Worm Drive Clips (Optional)	2 Nos.
		11.	Earthing Plumb (Connection of Lead Sheath to Armour)	1 Set.
		12.	Tinned Copper Brand (Main Earthing)	1 No.
		13.	Stress Control Mastic	3 Strips
		14.	Rain Sheds	9 Nos.
		15.	Insulaton Shield Continuting (Small Copper Braid+Copper Wire)	1 Set.
		16.	Heat Shrinkable Conducting Breakout	1 No.

BILL OF MATERIAL STD. PACKING KIT (+)

- Cable Components
- Kit Components
- Installation aids & Accessories (Part of std. kits)

● Installation aids & Accessories (Part of std. Kits)

No.	Descriptions	Qty.
	Mastic Sealing Tape	1 Roll.
	Cleaning Solvent	1 Bottle.
	Emery Sheet	1 No.
	Mopping Cloth	1 Pc.
	Installation Instruction Manual	1 No.

Electrical Performance

Tests Requirement	Requirement Test Value	CXO/E-112-Series
A.C. Dry Withstand	75 kV / 1 Minute	Pass
D.C. Voltage Withstand Test	144 kV / 30 Minute	Pass
Lightening Impulse Withstand Voltage	170 kV	> 170 kV

Accessories and optional items

- Standard Tail Length is 900mm for outdoor and 700mm for indoor terminations. Special tail lengths available on request.
- Solderless and special purpose earthing kits also available on request.
- Polymeric Insulators and T Brackets for installation of terminations on single pole are available on request.

Note

- All kits are supplied with full kit contents for making a termination.
- All Indoor terminations shall have 2 No. Rain shed on each core.

Ordering Informations

Cable Size (Sq. mm.)	Outdoor Kit Code	Indoor Kit Code
35-70	GPO-31	GPE-31
95-150	GPO-32	GPE-32
185-300	GPO-33	GPE-33
400	GPO-34	GPE-34