


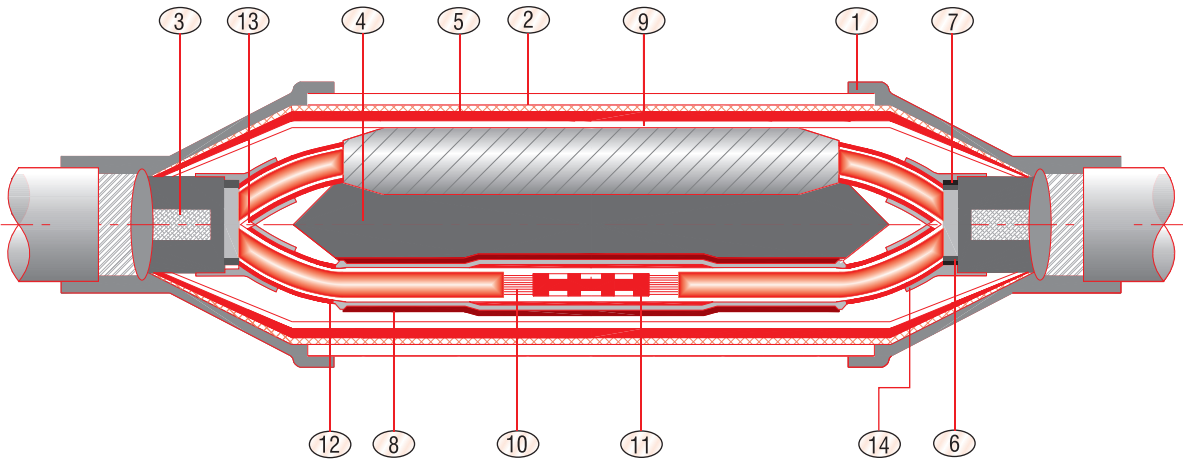

| No. | Descriptions                                                                                   | No. | Descriptions                                    |
|-----|------------------------------------------------------------------------------------------------|-----|-------------------------------------------------|
| 1.  | Heat Shrinkable Adhesive Linend Outer Jacketing                                                | 10. | Insulation Built Up Mastic                      |
| 2.  | G. I. Wire Mesh                                                                                | 11. | Inline Connector (Crimping Type) Ferrule Cu/al. |
| 3.  | Armour/lead Sheath Earthing Matl. (Copper Braid + Plumbing Metal + Flux + Copper Binding Wire) | 12. | Oli Barrier Sleeves                             |
| 4.  | Polymeric Core Sperator.                                                                       | 13. | Insulating Wedge                                |
| 5.  | Copper Woven Flexible Mesh Tape                                                                | 14. | Mastic Sealing Tape                             |
| 6.  | Glass Cushion Tape                                                                             | 15. | Cleaning Solvent *                              |
| 7.  | Heat Shrinkable Oil Barrier Sleeve                                                             | 16. | Mopping Cloth *                                 |
| 8.  | Heat Shrinkable Insulating Tubing                                                              | 17. | PVC - Na - Tape *                               |
| 9.  | Heat Shrinkable Internal Protection Sleeve                                                     | 18. | Silicon Grease *                                |
|     |                                                                                                | 19. | Emery Sheet *                                   |

\*Installation Aids & Part of Std. Kit

Electrical Per

| Tests                                | Requirement        | Typical Value |
|--------------------------------------|--------------------|---------------|
| A.C. Withstand Voltage               | 35 kV / 1Minute    | Pass          |
| D.C. Voltage Withstand Test          | 48 kV / 30 Minutes | Pass          |
| Lightening Impulse Withstand Voltage | 75 kV              | 95kV          |

Note

- All kits are supplied with full kit contents for making a straight through joint.

Ordering Informations

| Cable Size (Sq. mm.) | Kit Code |
|----------------------|----------|
| 16-35                | GPS-11   |
| 50-95                | GPS-12   |
| 120-185              | GPS-13   |
| 240-400              | GPS-14   |
| 500-630              | GPS-15   |

