


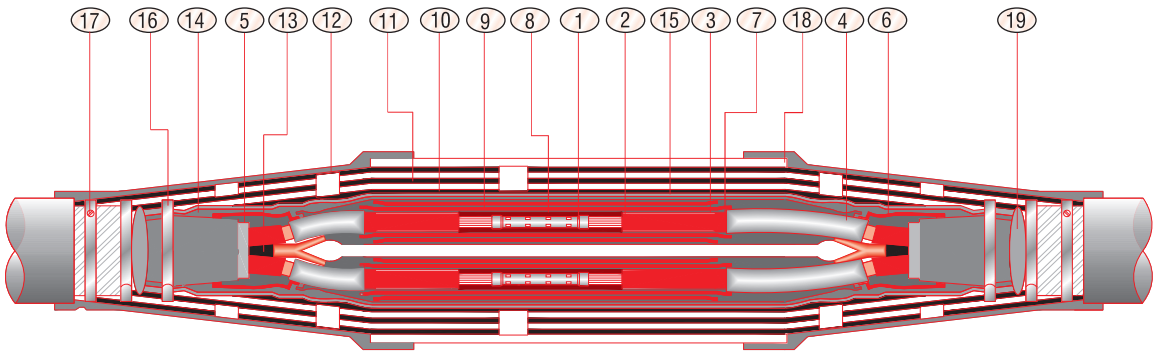

No. Description	No. Description	No. Description
1. Inline Connector	8. Stress Control Tubing (Black)	15. Earth Lead
2. Stress Control Mastic	9. Insulating Tube (Red)	16. Constant Force Spring Clamp
3. Oli Barrier Sleeve	10. Dual Wall Tubing (Black+Red)	17. Worm Drive Clamp
4. Conducting Tube (Black)	11. Metallic Protection Cage	18. Outer Jacketing Sleeve
5. Void Foiler	12. Adhesive Lined Side Sleeve	19. Earthing Plumb
6. Conducting Breakout	13. Insulating Wedge	
7. Grey Mastic	14. Copper Mesh Tape	

Electrical Performance

Tests	15-24kV System (8.7/15kV,11/11kV, 12.7/22kV)	36kV (19/33kV)
A.C. Dry Withstand Voltage	50kV / 1 Minute	75kV / 1 Minute
D.C. Voltage Withstand Test	96kV / 30 Minutes	144kV / 30 Minutes
Lightening Impulse Withstand Voltage	125kV	170kV

Note

- All kits are supplied with full kit contents for making a straight through joint.

Ordering Informations

Cable Size (Sq. mm.)	Kit Code 24kV	Cable Size (Sq. mm.)	Kit Code 36kV
25-50	GPS-21	35-70	GPS-31
70-120	GPS-22	95-150	GPS-32
150-240	GPS-23	185-300	GPS-33
300-500	GPS-24	400—	GPS-34

