


COLD SHRINK EPDM TUBES

Installation Manual

Product Description

Gala Brand GCTE Cold Shrink Insulating tubes are pre-expanded EPDM tube for fast, tool-free sealing of connectors and lugs. Made from chloride- and sulphur-free EPDM, they suit various electrical applications.

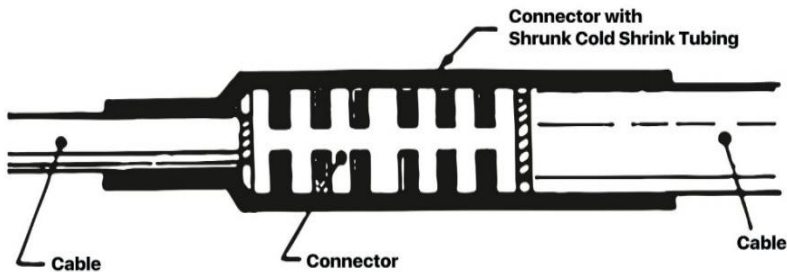

Drg. 01

Installation Instruction


Step 1: Prepare the Tube

Detach the loose end of the inner plastic core of the GCTE tube.

Step 2: Position the Tube

Slide the Tube onto the cable. Install the connector or lug (see Drg. 02), then move the tube over the sealing area.

GALA SHRINK FIT

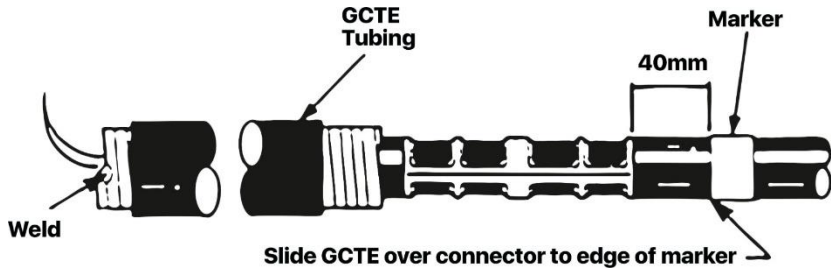


Drg. 02

Step 3: Prepare the Cable Surface

Clean and smooth the sealing zone. Remove dirt, sharp edges, and irregularities.

Step 4: Shrink the Tube

Hold the sleeve and cable firmly with one hand. With the other, pull the core counter-clockwise. As it unwinds, the tube contracts to form a tight, waterproof seal (see Drg. 03)

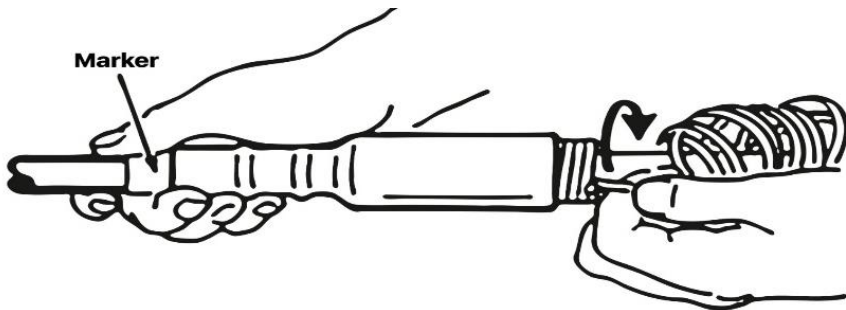

Drg. 03

GALA SHRINK FIT