

INSTALLATION INSTRUCTIONS


HEAT SHRINK WRAP AROUND SLEEVE

General Instructions:


The Heat Shrink Wrap Around Sleeves supplied by us are in an expanded form with a steel channel. When heated above 125°C they attempt to shrink back to their original dimensions, conforming to the objects they cover. Use a propane (preferred) or butane gas torch. Adjust the torch to obtain a soft blue flame with a yellow tip. Pencil-like blue flames should be avoided. Keep the torch aimed in the shrink direction to preheat the material. Keep the flame moving continuously to avoid scorching the material.




Installation of Heat Shrink Wrap Around Sleeve:

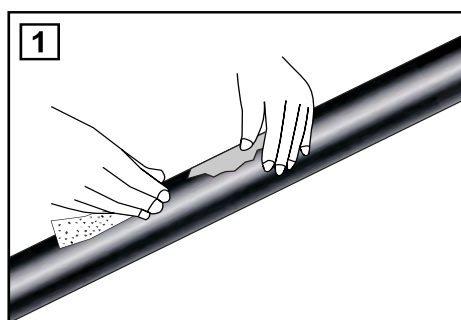


For good sealing roughen cable jacket with abrasive cloth strip

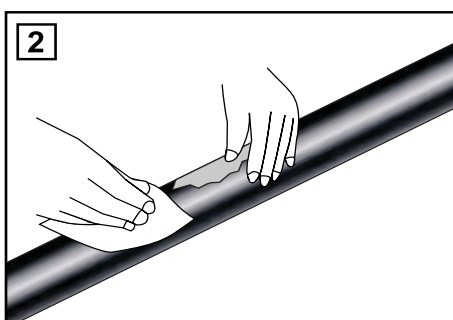


De-grease and clean cable jacket with tissue

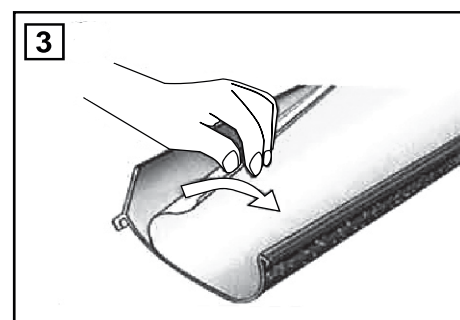

Remove protective foil from adhesive layer on the inside of the sleeve

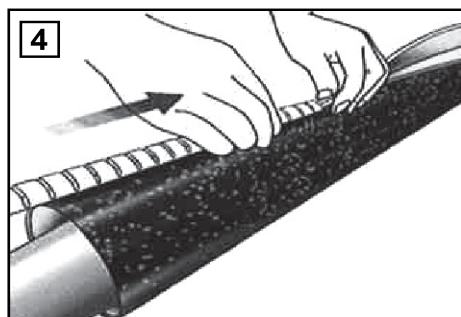

Wrap sleeve around the cable. Install the steel closure channel over the raised profiles of sleeve and center the sleeve over the damaged area

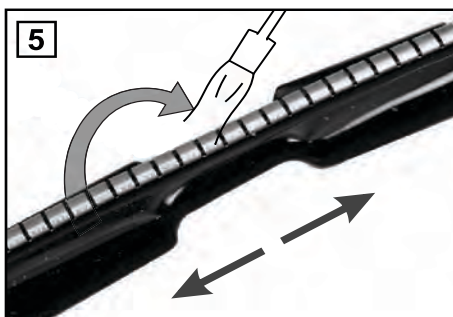

Start heating the metal channel area first then start shrinking sleeve at the center working the flame around all sides to apply uniform heat. After center part has shrunk work torch to one end of sleeve then the opposite end.



To determine if the sleeve has fully recovered, especially on the back and underside of the sleeve, check if all Thermal Indicating Spots have disappeared and adhesive has flowed from both ends.

The information contained in these installation instructions is for use only by installers trained to make electrical power installations and is intended to describe the correct method of installation for this product. However, we have no control over the field conditions which influence product installation. It is the user's responsibility to determine the suitability of the installation method in the user's field conditions. Our only obligations are those in our standard Conditions of Sale for this product and in no case will we be liable for any other incidental, indirect or consequential damages arising from the use or misuse of the products.